

FortiToken™ 300

One-Time Password Token

The FortiToken 300 product is comprised of a hardware token (FortiToken 300 PKI USB token) with a chip operating system that resides on the smart card chip of the token, and a security client software application (works only with FortiToken 300).




Strong Authentication at your Fingertips

Each FortiToken 300 PKI USB token is a hardware-security-module for authentication and cryptographic applications based on Microsoft CAPI* and PKCS#11**.

*CAPI: Cryptographic Application Programming Interface.

**PKCS#11: Public-Key Cryptography Standards #11 v2.20, Cryptographic Token Interface Standard.

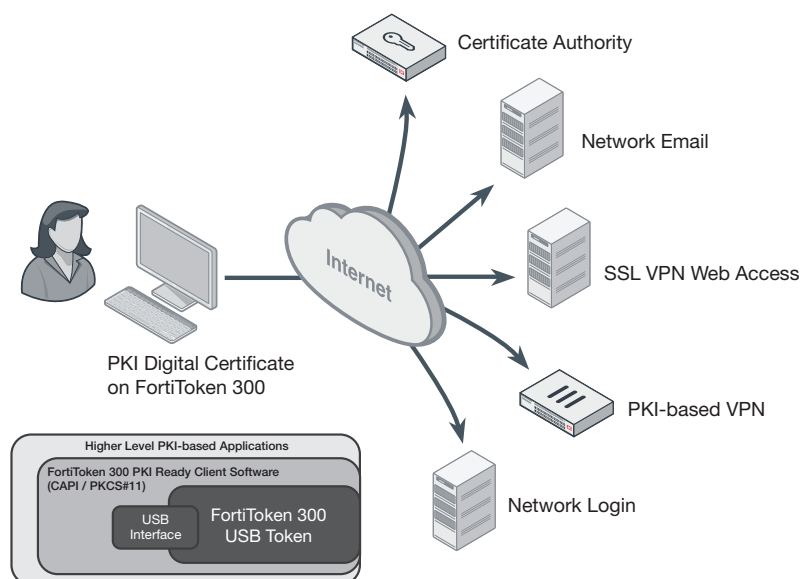

Highlights

- Driverless USB device
- High-performance smart card chip
- FIPS140-2 Level 3 Certified
- Windows, Linux and MacOS supported
- MS-CAPI and PKCS#11 APIs supported
- Onboard random number generator
- Onboard RSA, AES, DES/3DES, SHA-1, SHA-256 algorithms approved by NIST FIPS CAVP
- Economical PKI authenticator
- Perpetual license
- Tamper evident hardware USB Token
- Easy integration with various PKI applications

SPECIFICATIONS

FORTITOKEN 300	
Supported Operating System	32-bit and 64-bit Windows XP SP3, Server2003, Vista, Server2008, 7, 8, 10, Server2012, 8.1 32-bit and 64-bit Linux MAC OS X
Middleware	Windows middleware for Windows CSP Direct-called library for PKCS#11 under Windows, Linux and MAC
Standards	X.509 v3 Certificate Storage, SSL v3, IPsec, ISO 7816 1-4 8 9 12, CCID
Cryptographic Algorithms	RSA 512/1024/RSA 2048 bit ECDSA 192/256 bit DES/3DES AES 128/192/256 bit SHA-1 / SHA-256
Cryptographic Functions	Onboard key pair generation Onboard digital signature and verification Onboard data encryption and decryption
Cryptographic APIs	Microsoft Crypto API (CAPI), Cryptography API: Next Generation (CNG) PKCS#11 PC/SC
Processor	16-bit smart card chip (Common Criteria EAL 5+ certified)
Memory Space	64KB (EEPROM)
Endurance	At least 500,000 write/erase cycles
Data Retention	More than 10 years
Connectivity	USB 2.0 full speed, Connector type A
Interface	ISO 7816 CCID
Power Consumption	Less than 250 mW
Operating Temperature	0–70°C (32–158°F)
Storage Temperature	-20–85°C (-4–185°F)
Humidity	0–100% without condensation
Water Resistance	IPX8 with glue injection (under evaluation)

PLATFORM SCALABILITY
FortiToken scalability for specific platforms can be found in the Fortinet Product Matrix located at http://www.fortinet.com/sites/default/files/productdatasheets/Fortinet_Product_Matrix.pdf

ORDER INFORMATION

Product	SKU	Description
FortiToken 300	FTK-300-5	5 USB tokens for PKI certificate and client software. Perpetual license.
	FTK-300-10	10 USB tokens for PKI certificate and client software. Perpetual license.
	FTK-300-20	20 USB tokens for PKI certificate and client software. Perpetual license.
	FTK-300-50	50 USB tokens for PKI certificate and client software. Perpetual license.
	FTK-300-200	200 USB tokens for PKI certificate and client software. Perpetual license.



GLOBAL HEADQUARTERS
Fortinet Inc.
899 KIFER ROAD
Sunnyvale, CA 94086
United States
Tel: +1.408.235.7700
www.fortinet.com/sales

EMEA SALES OFFICE
905 rue Albert Einstein
06560 Valbonne
France
Tel: +33.4.8987.0500

APAC SALES OFFICE
300 Beach Road 20-01
The Concourse
Singapore 199555
Tel: +65.6395.2788

LATIN AMERICA SALES OFFICE
Sawgrass Lakes Center
13450 W. Sunrise Blvd., Suite 430
Sunrise, FL 33323
United States
Tel: +1.954.368.9990